
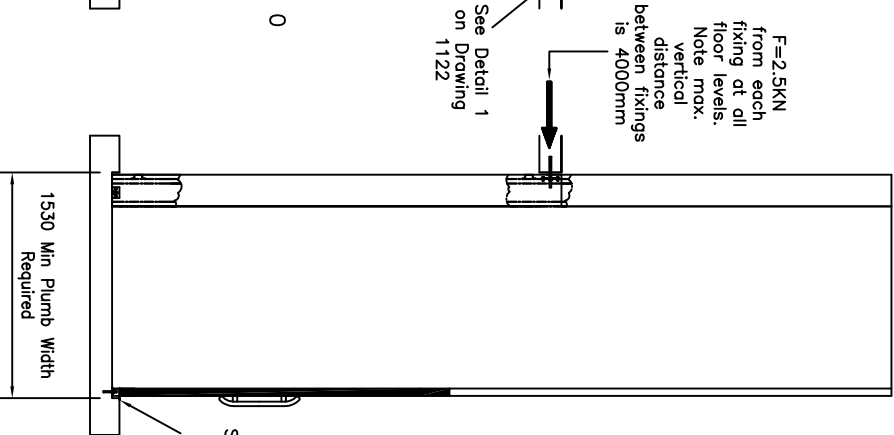
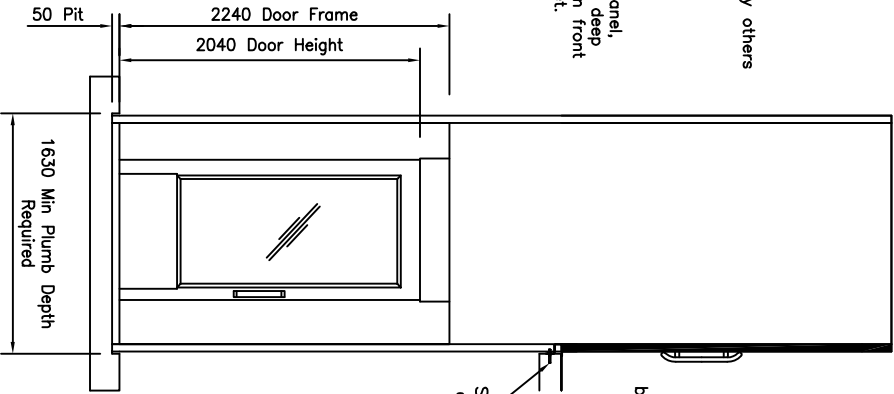


Rated Load	410kg
Supply	415v, 3ph, 16 amp Type C, 30mA RCB0 protected
Running Current	4.7 amps
Starting Current	18 amps
Platform Size	1100 wide x 1480 deep

Pit	50 deep
Door Level 0	GL Non Fire Rated
Door Level 1	GL Non Fire Rated
Door Level 2	N/A
Communication	Telephone/Autodialer


Enclosure Colour	RAL 9003
Door Colour	RAL 9003
Door Frame Colour	RAL 9003

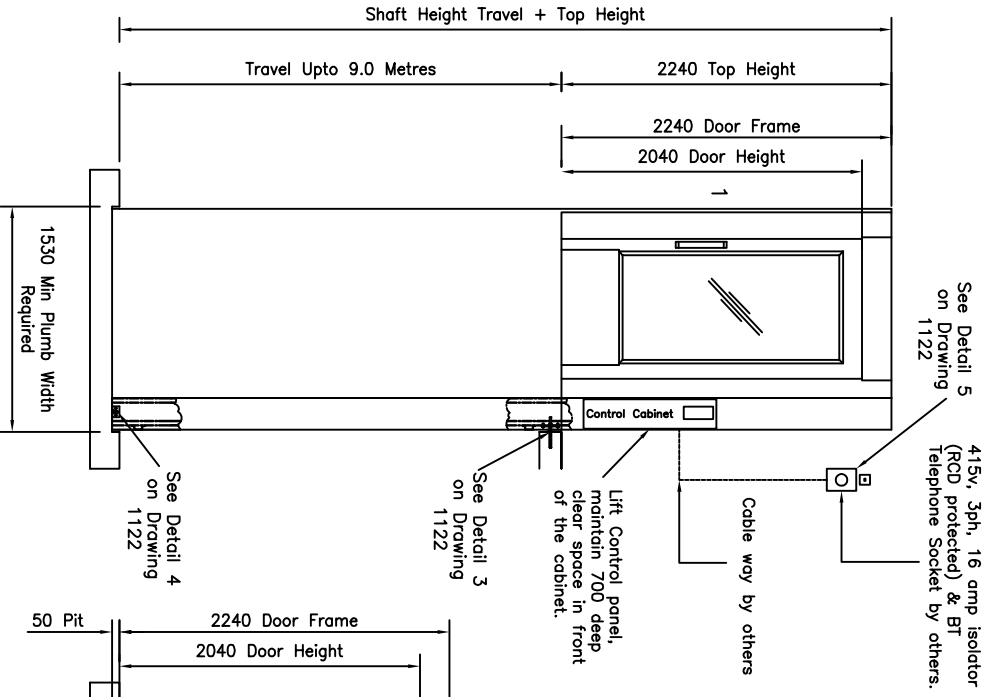


F=2.5KN from each fixing at all floor levels. Note max. vertical distance between fixings is 4000mm

See Detail 1 on Drawing 1122

See Detail 2 on Drawing 1122

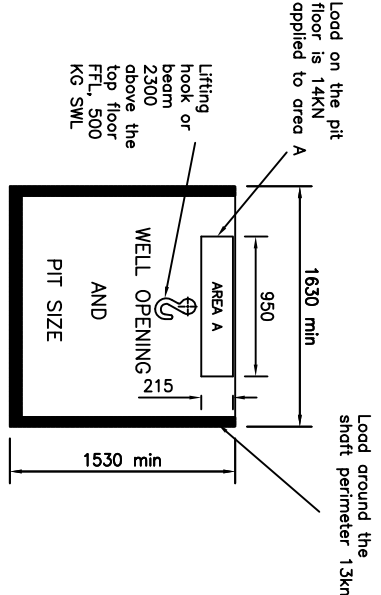

Fixing of support frame to the building fabric at each floor and with a maximum pitch of 4000. Reaction = 2.5kn.

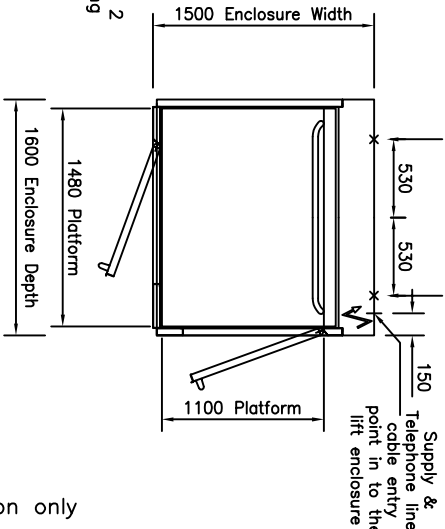

SEE DRAWING NO. 1122 FOR A GENERAL LIST OF WORKS BY OTHERS.

Issued for information only

BY	DATE	ISSUE	MODIFICATION	CHECKED
TMP	26/10/04	B	GENERAL UPDATE	
TMP	21.10.06	C	Pit loadings Amended	
TMP	31.10.06	D	Re drawn	
TMP	4.7.07	E	Shaft width amended	
TMP	3.4.13	F	Re drawn	

PLATFORM LIFT STANDARD LAYOUT
ADJACENT ARRANGEMENT WITH 1100mm PLATFORM STEEL ENCLOSURE

NICHE LIFTS LTD Suite 3, 27 London Road, Bromley, Kent, BR1 1DG Tel: 020 8296 2862 Fax: 020 9466 1695
e-mail: contracts@nichelifts.co.uk Web Site: www.nichelifts.co.uk

NICHE LIFTS Ltd		DRAWN BY	DATE	CHECKED	SCALE
Do not scale this drawing. All dimensions in millimetres		TMP	31.10.06		NIS
		DRAWING NUMBER		1029/F	