


Specification

750x900 mm Platform

- Front Access
- Rated load 225 kg
- Speed 0.1 m/s
- Supply: Single phase 220 VAC
- Carriage Colour: RAL 7035
- Rail finish anodized aluminum
- Wall Mounted
- 20-50 degree stair angle
- Electrical components rated to IP65
- Control units at both landings incorporate Up/Down, barrier and platform position constant pressure controls.



Shear
3.75 kn



Notes

FIXING RAIL REACTIONS

- Others to ensure that the fixing wall can withstand the loads from the platform lift.
- Others to supply a 13 amp RCD protected socket outlet at the top landing below our control unit for the platform lift supply.
- All wiring to the control units to be surface mounted.

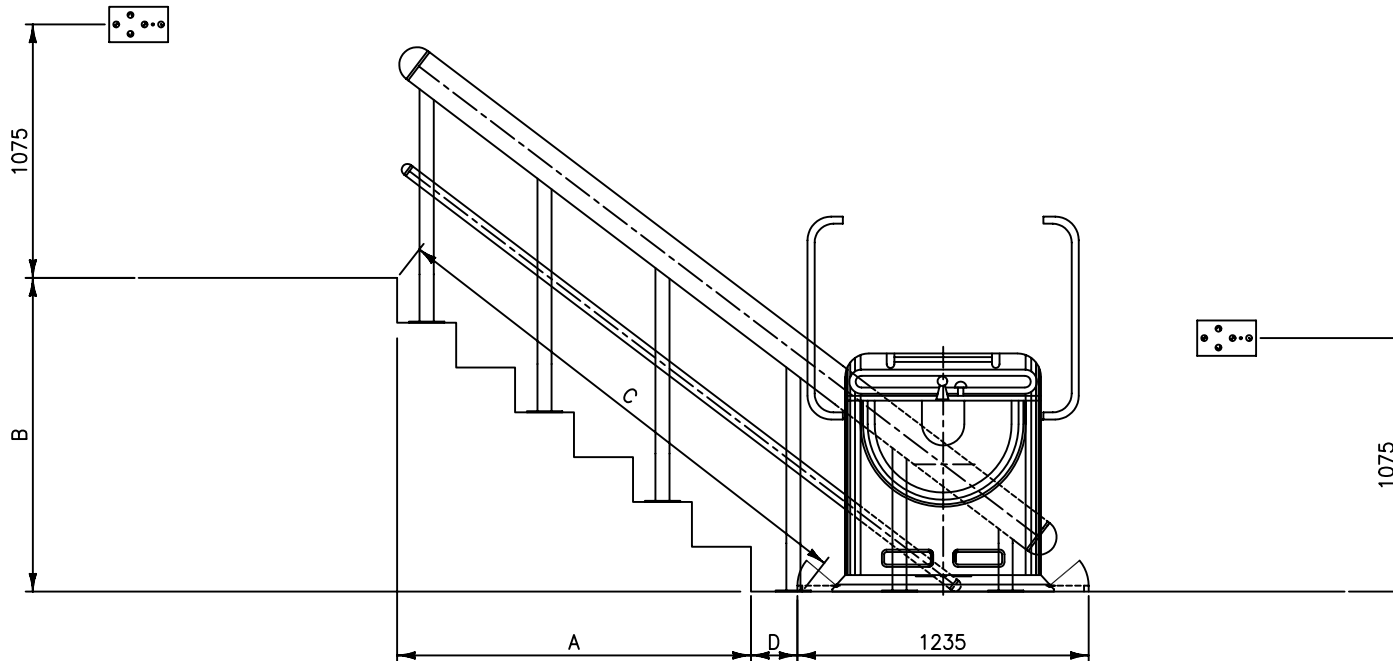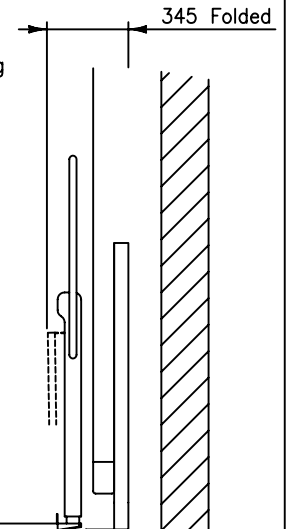

BY	DATE	ISSUE	MODIFICATION	CHECKED

INCLINED PLATFORM LIFT 900 X 750 PLATFORM GENERAL ARRANGEMENT RIGHT HAND STANCHION MOUNTED
(Issued for information only)

NICHE LIFTS Ltd
Do not scale this drawing. All dimensions in millimetres

DRAWN BY	DATE	CHECKED	SCALE
TMP	2.5.07	FWP	1:25
DRAWING NUMBER			
1175/A			